

Article / Artículo

LOOM

Composition / Composición

35 % Recycled Cotton
40 % Viscose 17 % Linen
8 % Polyester

Weight / Peso (+/- 5%)

550 gr l/m - 395 gr/m2

Width / Ancho (+/- 1 cm)

140 Cm

Roll length / Longitud pieza

+/- 35 meters

EN ISO 12945

4 - 5 (A)

Pilling resistance /

EN ISO 12945-2:2020

Resistencia al Pilling

SCALE A-D; A, best value

EN ISO 12947

50.000 cycles (A)

(MARTINDALE)

Change of appearance 3000 c: 5

Abrasion resistance /

SCALE A-D; A, best value

Resistencia a la abrasión

Dimensional Stability /

Estabilidad Dimensional (30°

C) (+- 3%) Warp /

3% - 3%

Urdimbre -Weft / Trama

Warp: 2,50 mm

Seam slippage resistance /

Weft: 3,90 mm

Resistencia a las costuras

(A)

EN ISO 13936-2:2004

SCALE A-D; A, best value

Breaking strenght /

Warp: 750 N

Resistencia a la tracción

Weft: 1100 N

(A)

EN ISO 13934-1:2013

SCALE A-D; A, best value

Upholstery classification /

(A)

Clasificación tapicería

EN 14465:2003/A1:2006

SCALE A-D; A, best value

Fire resistance certification /

EN 1021 Part 1


Certificado resistencia al fuego

DABEDAN
TEJIDOS IGNI-FUGOS

ROIG
original fabrics
SINCE 1985



RECYCLED CO
35%

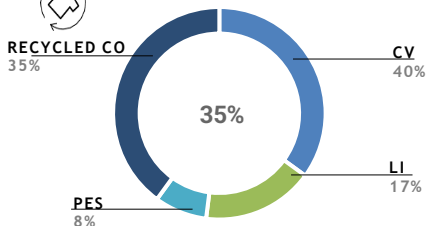

Stain resistance /
Antimanchas

Stainwall®
Resistance



Washing Instructions /
Instrucciones de lavado



All our fabrics are designed and produced in our factory /
Todos nuestros tejidos están diseñados y fabricados en
nuestra fábrica

MADE IN
BARCELONA



ROIG by Dabedan
Avda. Can Bordoll 55,
08202 Sabadell (Barcelona), Spain
dabedan@dabedan.com
www.dabedan.com